EnVision
e-Learning & Universal Simulation

Diesel Hydrotreating Unit with Vacuum Drier

A self-paced MultiMedia based Tutorial/CBT and real-time dynamic simulation of an Ultra-Low Sulfur Diesel Hydrotreating Unit.

Tutorial/CBT:

This interactive tutorial provides an Overview, Fundamental Principles, and Control and Operating Principles for an Ultra-Low Sulfur Diesel / Gas-Oil Hydrotreater Unit using Voice, Video, Animation and Graphics.

Overview
- Introduction
- Importance of Hydrotreating (HDS)
- Various Hydrotreating (HDS) Processes
- Diesel-HDS Unit Overview

Key Process Variables
- Unit Pressure
- Reactor Temperature
- Quench Strategy
- Separator Temperatures
- Wash Water
- Treat Gas Rate and Hydrogen Purity
- Feed Vaporization
- Hydrogen Partial Pressure
- Hydrogen Consumption
- Product Stripper and Vacuum Drier

HDS Components
- Feed Preparation and Preheat Section
- Reactor Section
- Reactor Effluent Cooling and Separation Section
- Amine Absorber
- Recycle Gas Compressor
- Make-up Hydrogen
- Product Stripping Section

Principles of HDS
- Hydrotreating Reactions
- Reaction Kinetics
- Hydrotreating Catalyst
- Catalyst Deactivation and Regeneration

Startup Operation

Shutdown Operation

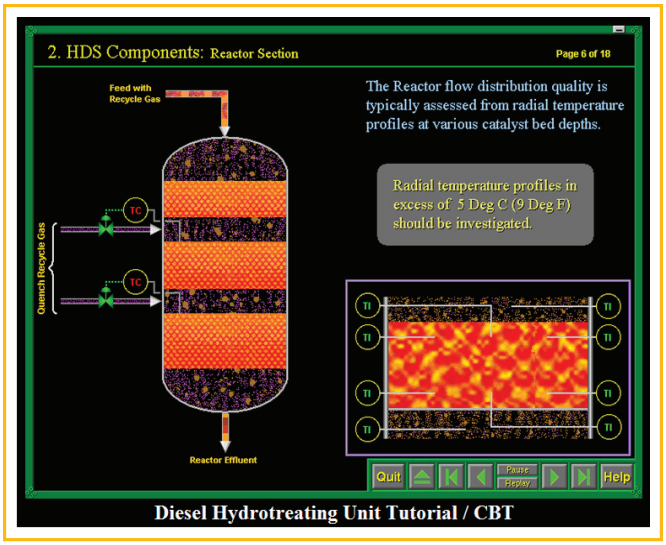

Safeguard System
- Introduction
- Unit Depressurization
- Reactor High Temperature Shutdown
- Reactor Feed Shutdown
- Feed Furnace Shutdown
- Recycle Gas Compressor Shutdown
- High Pressure Separator Safeguards
- Absorber Safeguards

Troubleshooting
- High Reactor Temperature
- Loss of Feed to Reactor
- Loss of Recycle Gas Compressor
- Loss of Make-up Hydrogen
- Loss of Stripping Steam
- Wet Diesel Product

- Tutorial has a built-in Quiz and comes with a Learning Management System (LMS) called TutAdmin. The LMS allows an instructor to register trainees and monitor their performance and Quiz scores
- Tutorial is available as a Standalone or Web based application
- Available in English, Chinese, Danish, Dutch, French, German, Spanish and Swedish

Diesel Hydrotreating Unit with Vacuum Drier

Simulation

GSE's EnVision simulation is a real-time dynamic process simulation program used for Operator Training. It is based upon a rigorous and High-Fidelity mathematical process model to provide a realistic dynamic response of a process unit.

The Simulator allows a Trainee to Practice:

- Startup and Shutdown Operations
- Normal Operations
- Emergency Shutdown Operation
- Control Exercises
- Troubleshoot and practice recovery from Equipment, Instrument, and Control Valve Malfunctions

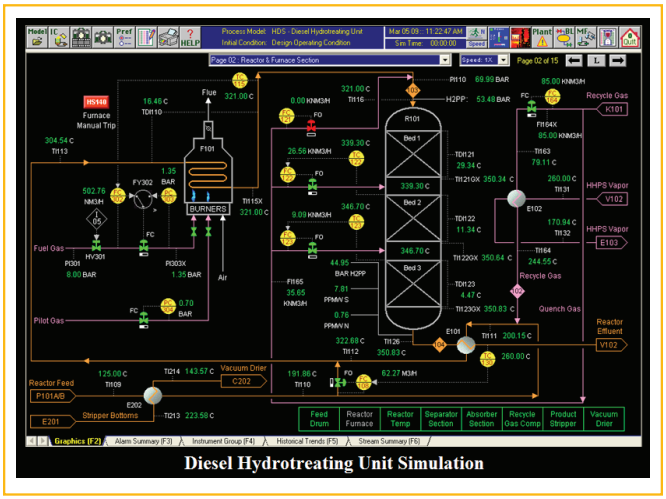

Major Equipment:

- Feed Surge Drum
- Feed Furnace
- Reactor with Three Beds
- Hot & Cold High Pressure Separator
- High Pressure Amine Absorber
- Recycle Gas Compressor
- Product Stripper & Vacuum Drier

Key Operating Variables:

• Reactor Feed Total:	331.0 M3/H	(50 MBPD)
• SR LGO:	165.5 M3/H	(25 MBPD)
• Kerosene:	66.2 M3/H	(10 MBPD)
• LCO:	66.2 M3/H	(10 MBPD)
• Coker / Visbreaker LGO:	33.1 M3/H	(5 MBPD)
• Make-up Hydrogen:	27.5 KNM3/H	(968 MSCFH)
• Diesel Product:	325.7 M3/H	(49.2 MBPD)
• Wild Naphtha:	10.2 M3/H	(1.55 MBPD)
• Off Gas Product:	4487 NM3/H	(159 MSCFH)
• Reactor Inlet Pressure:	70 BAR	(1015 PSIG)
• Reactor Inlet Temperature:	321.0 C	(609.8 F)
• Reactor WABT:	347.7 C	(658.0 F)
• Feed Sulfur:	0.92 Wt% S	
• Feed Nitrogen:	289.2 PPM N	
• Product Sulfur:	8.90 PPM S	
• Product Nitrogen:	0.87 PPM N	

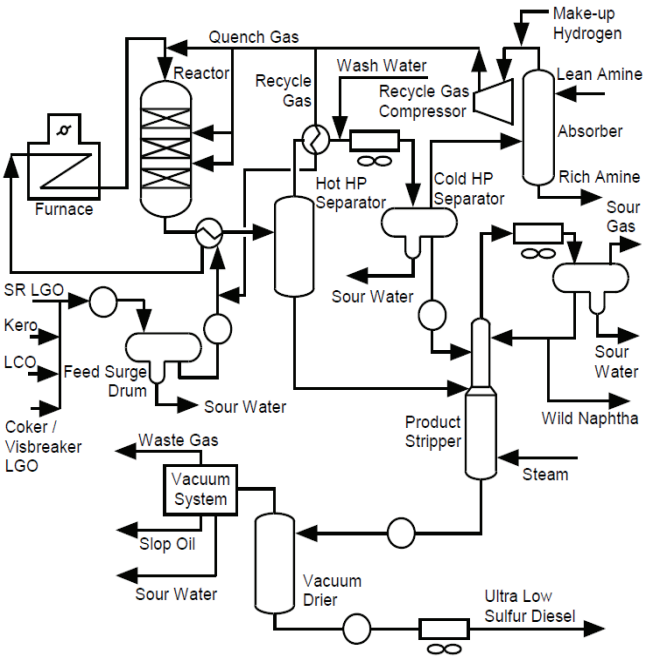

- Simulation comes with a Learning Management System (LMS) called SimAdmin that allows an instructor to register trainees and monitor their performance
- Simulation is available as Standalone (Single or Dual Monitor) and Instructor-Trainee versions

EnVision™ is a trademark of GSE Systems, Inc. All other trademarks are the property of their respective owners. The information in this literature is subject to change without notice and is not to be construed as a warranty.

DS.ENV.23.VB 07/24

GSE SOLUTIONS
Future of Power Operations

info@gses.com | www.gses.com